

DS-685 Series

Ultimate Price Computing Scale at Anywhere



- Long battery life
- Super Contrast Display
- Compact and portable


DS-685 helps to increase your sales faster.

Fast transaction

- Preset keys allow you to recall the unit price by one touch and eliminate errors.
- Fast weighing speed.

Compact and portable

- Small size yet sturdy construction makes the scale extremely portable

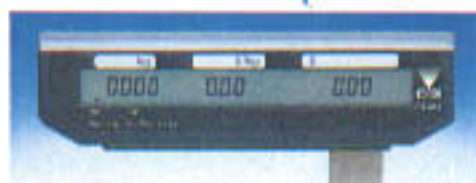

Customer Side Display



DS-685P



DS-685B

Orange 5.25	Apple 4.25	RED Grapes 3.75
Potato 4.50	Onion 3.75	Carrot 2.45

You can freely assign unit prices of products on Preset keys.

Easy to see

- Super Contrast Display provides superior readability under the bright sunshine or even under dim light!

Battery

- Without replacing D cell batteries, the scale runs for months. (*1)

(*1): Typically the scale can run 500 hours (manganese battery) and 1000 hours (alkaline battery) under continuous use. These hours depends on type, make of batteries, and temperature and humidity under use.

DS-685F series

For in-store use



DS-685FB

Auto power-off function saves battery power

Specifications

Capacity and scale interval

Max 15kg	Max 30lb
e= 5g	e= 0.01lb

Weighing sensor	Load cell
Display	Weight5 digits Unit price5 digits (up to 7 digits) Total price ... 6 digits (up to 8 digits)
Power source and power consumption	Battery (6 x D cell) 8V, 0.1W AC adapter DC 6V ~ 8V, 0.1W
Operating temperature	-10°C to 40°C (14°F to 104°F)
Operating humidity	Max. 85%RH (Non-condensing)
Dimensions and net weight	DS-685B: 304(W) x 296(D) x 124(H) mm 4.6kg/10.1lb DS-685P: 304(W) x 340(D) x 435(H) mm 5.8kg/12.8lb
Platform size	300(W) x 225(D) mm / 11.8 x 8.9 inches

*Meets or exceeds the requirements of OIML Class II.
*Specifications are subject to change without notice.

DIGI Retail Scale and Labeling Systems NEW BRUNSWICK INTERNATIONAL, INC.

76 Veronica Avenue
Somerset, NJ 08873
TEL (732) 828-3633
FAX (732) 828-4884

550-A West Lambert Road
Brea, CA 92821
TEL (714) 671-7911
FAX (714) 671-0799

website: nbi.digi.com

* Meets or exceeds the requirement of OIML III.

