DPS-4600M

Prepack Scale Printer

DPS-4600M
Twin labeller type
(Stand:optional)

The innovations of the DPS-4600M simplify conventional Weighing/Labelling operations.

Large color touch screen

The 10.4 inch adjustable color TFT display ensures that operators can change the angle according to their height or the environment. Operators can also choose the color and position of the display's function keys according to their needs to simplify tasks.

Easy PLU search

The DPS-4600M supports the "easy PLU search" function. The PLU search function combined with the large touch screen allows operators to quickly find PLUs, speeding up the time needed to find the correct PLU among thousands.

DPS-4600M
Twin labeller type
(Stand:optional)

Easy label placement

Simply lift the product for quick label placement.

Shoppers want detailed information about the products, including "Place of origin" and "Traceability" on the labels. Shoppers also prefer "Bargain price" clearly shown on the labels.

€ 19,20

SIRLOIN STEAK
FAMILY PACK!

REFERENCE NO.	P5P254471
SLAUGHTER HOUSE	SP25114
1st CUTTING HOUSE	SP5351
RAISED IN COUNTRY	
BORN IN COUNTRY	
COUNTRY OF ORIGIN	SPAIN

PRICE kg 48.00   WEIGHT 0.525

1 100000 519201
PACKED DATE 03.12. 9   PRICE 19.20

TERAOKA STORE
5-13-12NUGAHARA OHTARU TOKYO
TEL: 81-3-3752-0572

RIB EYE STEAK
(SCOTCH FILLET)
FAMILY PACK

TOTAL PRICE $ 1.86

0 203046 901661

UNIT PRICE $ 1.845/kg

Nutrition Facts
Valeur nutritive

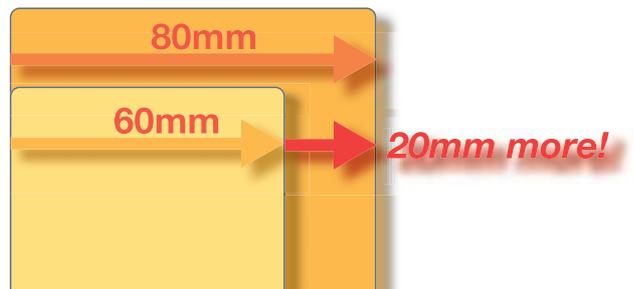NET WT / QTY 1.013kg

PACKED ON 2006 JN 6

BEST BEFORE 2006 JN 11

PLU NUMBER 003046

DIGI SUPERMARKET

20%OFF

Sale

The twin labeller can be used for freely designed POP labels showing ingredients or other product information.

Easy to prepare, wide labels

Use the additional 20mm of label width to print more information to meet label regulations and still have space for advertising messages.

80mm

60mm

20mm more!

Specifications

Capacity

Interval type	Multi-interval	Single interval
Capacity	Max 6/15kg	Max 30 lb
Scale interval	e=2/5g	e=0.01 lb

Printer

Type————————Thermal printer
Dot density————8 dots/mm
Print speed————Max.140 mm/s
Print width————25 to 80 mm (0.98 to 3.14 inches)
Print length————20 to 150 mm (0.79 to 5.9 inches)
Back paper width——Max. 86 mm (3.38 inches)
Label roll diameter——Max. 190 mm (7.48 inches)
Label roll core diameter—42 / 76 mm (1.65 / 2.99 inches)

Console

Display panel————TFT LCD color (10.4 inches)
Operational keys————Mechanical function keys and touch screen
Standard memory————4 MB
Program installation——Flash memory

Numerical display

Tare————————4 digits
Weight————————6 digits
Unit price————6 digits
Total price————6 digits

Programmable items

PLU————————Approx. 3000 items
Ingredients————2000 items
Advertising message——80 items
Extra print format——50 items
Text————————25 items
Image————————100 items
Barcode————————UPC, EAN (8 or 13 digits)

Note : The memory allocation for the DPS-4600M software is not fixed for each file so the figures shown above are only estimates of the maximum possible for each item.
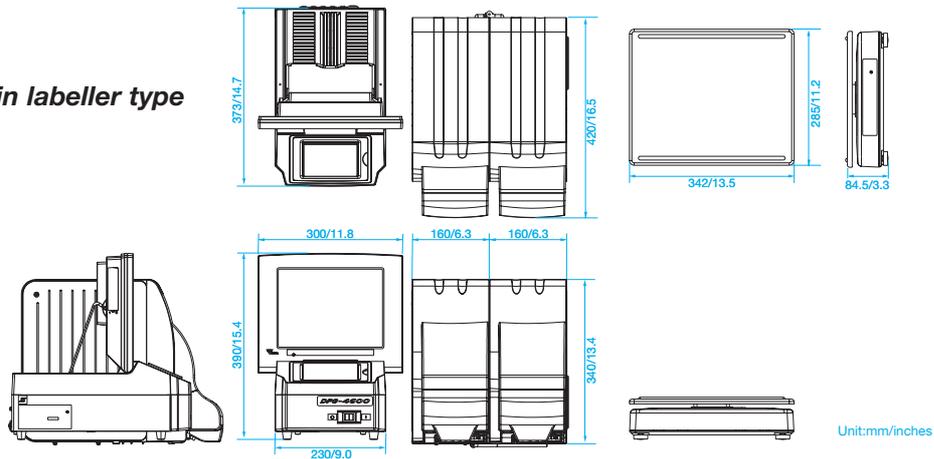
General

Housing————————Resin and stainless steel construction
Interface————————IBM keyboard, RS-232C, Ethernet, 4-line
Power supply————AC 100-200 / 220-240V, 50 / 60Hz
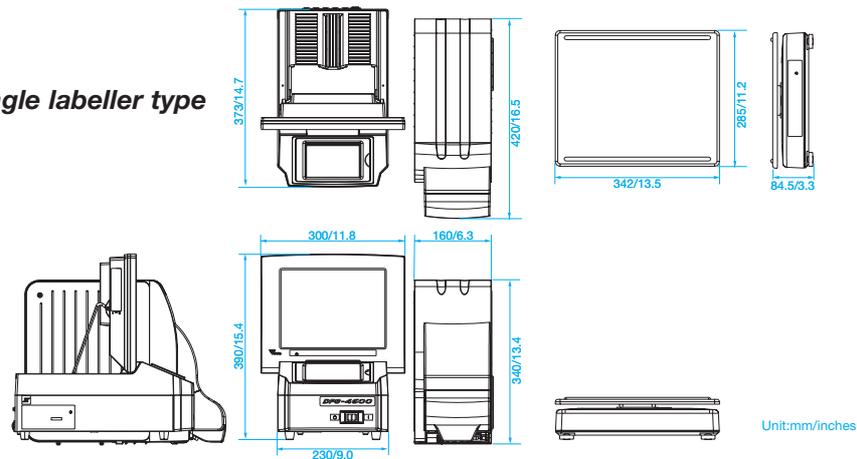Power consumption——1A Single / 150W 1,2A Twin / 250W

Net weight

Main unit————————Single labeller type : 19.7 kg / 43.4 lb
Twin labeller type : 25.7 kg / 56.7 lb
Scale platform————3.8kg / 8.4 lb

Dimensions

Twin labeller type

373/14.7 420/16.5 285/11.2 342/13.5 84.5/3.3
300/11.8 160/6.3 160/6.3 390/15.4 340/13.4 230/9.0

Unit:mm/inches

Single labeller type

373/14.7 420/16.5 285/11.2 342/13.5 84.5/3.3
300/11.8 160/6.3 390/15.4 340/13.4 230/9.0

Unit:mm/inches

Specifications are subject to change without prior notice.